




Part# RM-F117A-SD-MIL

Features

- MIL-STD-810F/G Compliant
- DVI & VGA Input
- 1U 17.3" Rackmount Monitor, 1920 X 1080 Resolution
- Wide Operating Temperature (-0C to 50C)
- 2 USB Accessory HUBS – 1 Front, 1 Rear USB 2.0 Type A (for flash drive, hard drive, KB/Mouse etc)
- Sealed IP65 silicone backlit keyboard trackball mouse
- USB 2.0 Keyboard & Mouse
- Self-locking and auto release rails for convenience.
- MIL power input connector

Options

- DC 9~36 power input
- High Brightness – 1000 nits
- HDMI, Display Port Input
- Resistive Touchscreen

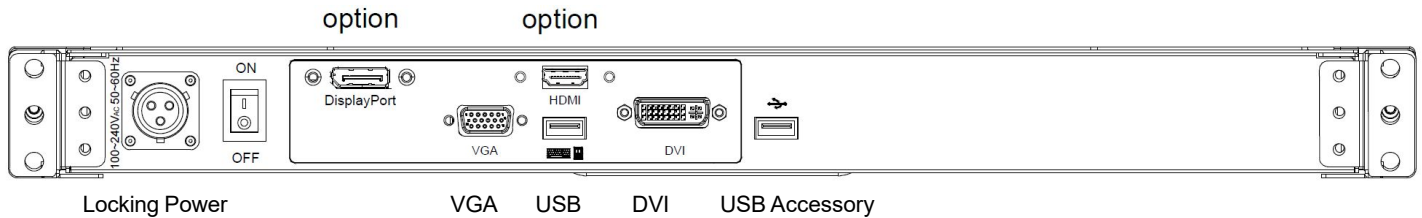

Part No.	RM-F117A-SD-MIL	
Direct no. of Computers	1	
KVM Connectors	VGA, DVI-D, USB	
LCD	Size	17.3"
	Backlight	LED
	Resolution	1920 X 1080 (supports resolution up to 1920 X 1200)
	Max.color	16.7M
	Luminance	400cd/m2
	View Angel (H/V)	160 / 140
	Contrast Ratio	600 : 1
USB HUB	1x Front , 1x Rear USB 2.0 Type A for peripheral USB devices	
Touch Screen	YES - optional touchscreen	
KB/Mouse Emulation	USB 2.0	
Audio	NO Audio	
Rack Mounting Range	15" to 30" (front rails to rear rail)	
Power	100-240V AC 50/60Hz via 3 pins lock connector	
Environment (MIL-STD-810G)	Operation temp: -0 to 50°C (MIL-STD-810, Method 501.5 & 502.5)	
	Storage temp: -20 to 60°C(MIL-STD-810, Method 501.5 & 502.5)	
	Humidity: 5% - 95%, non-condensing (MIL-STD-810, Method 507.5)	
	Shock/Vibration: Procedure VI - 50G acceleration (11ms duration) – MIL-STD-810, Method 516.6 Altitude: 10,000 ft Operational, 30,000 Storage (MIL-STD-810, Method 500.5)	
Physical Dimensions / Net Weights	19" x 1.65"x 16" (WxHxD) / 24.25lbs	
Packing Dimensions / Gross weights	28.3" x 6.3"x 24" (WxHxD) /33.2lbs	
Accessory		
1.8 meter Power Cord with lock connector, 1.8 meter VGA Cable , 1.8 meter DVI Cable, 1.8 meter USB Cable		